
20 Ton Excavator Two Section Demolition Boom High Reach Demolition Arm for PC200 SY200 CAT320 Long Arm Excavator

Our Product Introduction

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Zhonghe
- Certification: CE
- Minimum Order Quantity: 1 piece
- Price: $8571/pieces
- Packaging Details: Bubble bag packaging
- Delivery Time: 25 work days
- Payment Terms: T/T
- Supply Ability: 5 Piece/Pieces per Month



Product Specification

- Part Name: Excavator Demolition Boom
- Material: Q355B/Q690D
- Suitable Excavator: 20 Ton
- Length: 15-22m
- Warranty: Six Months
- Condition: New Product
- Quality: Top Quality
- MOQ: 1 PCS
- Packing: Bubble Bag Packaging
- After-sales Service Provided: Online Video Support



for more products please visit us on excavatorlongarm.com

More Images








Our Product Introduction

Product Description

for more products please visit us on excavatorlongarm.com



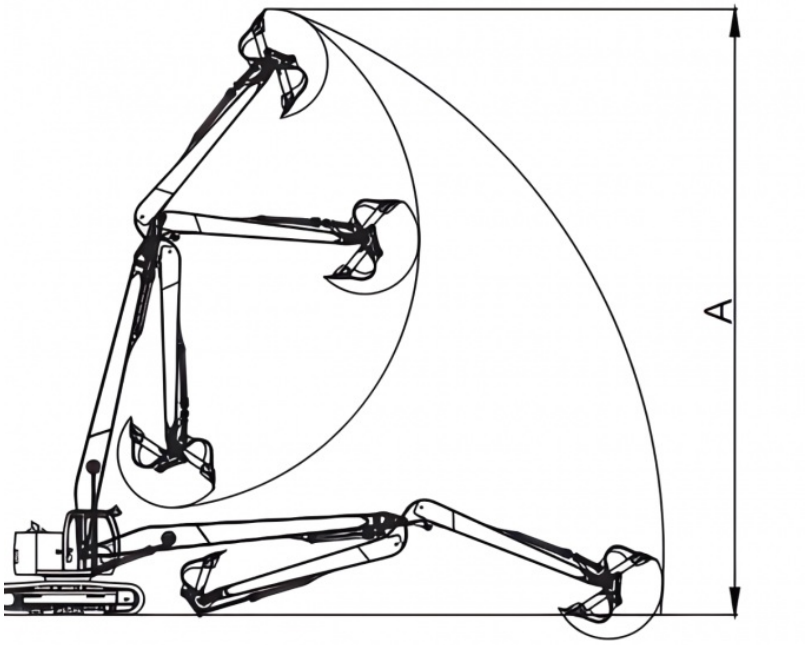

挖机 Excavator (ton)	总长 Total Length (mm)	运输高度 Transport Height (mm)	最大举升高度 Max Lift Height (mm)(A)	破碎锤 Hammer Drill Rod (mm)	油缸 Cylinder (ton)	配重 Counterweight (ton)
6-8	8000	2800	9100	50	6	1
6-8	10000	3000	11000	50	6	1.5-2
10-16	12000	3000	13200	68	12	1-2
20-24	15000	3300	16300	100	20	1-2
25-28	18000	3400	19500	100	20	-
30-36	20000	3400	21600	100	22	2
40-45	22000	3400	23800	100	22	-
45-50	24000	3400	26000	100	22	-





Introduction

The boom and arm's design are reasonable, the demolition arm can rotate normally after installing the crushing hammer, the open angle between boom and arm can achieve 180 degrees, higher the overall removal height. The overall production process is ahead of the average level of the industry, and the quality of the products is better than that of the same grade.

Material

Multiple steel grades optional: Q355B, Q690D. Higher-grade steel makes the boom lighter, reduces machine load and extends service life.

Suitable working conditions for building demolition arm

Urban village reconstruction, building demolition, old factory building reconstruction, high-rise demolition project, etc.




Product advantages for ZHONGHE demolition Arm

Post-weld boring for the whole boom, precision reaches the standard of original factory arms, stable quality.

Larger opening angle between main and minor boom, higher demolition reach. Optimized arm proportion brings faster lifting speed.


Reasonable structural design, the same excavator can carry larger attachments.

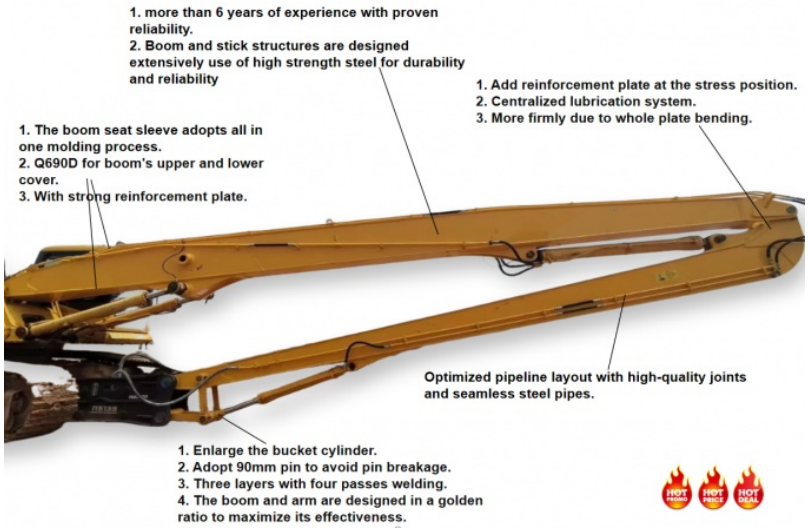


Our Material Advantages Over Competitors



Product Display

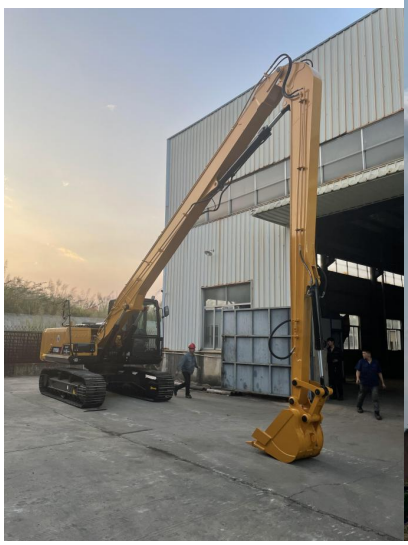

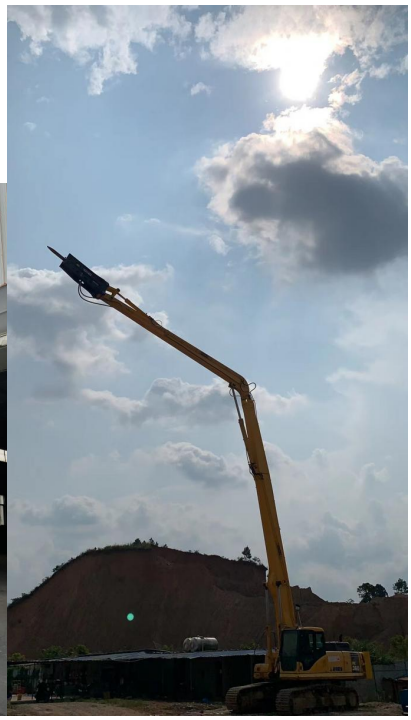


SY75C
SANY





COMPANY ADVANTAGES



ZHONGHE MACHINERY

We are Zhonghe Machinery Manufacturing, located in Kaiping, Guangdong — a fully integrated manufacturer dedicated to the research, design, production and global sales of excavator attachments.

Our modern steel-structure workshop is fitted with a complete set of advanced equipment, including CNC flame cutters, heavy-duty boring mills, plate rolling machines and stress-relieving facilities. This robust hardware guarantees reliable fabrication and enables us to handle large custom orders with consistent quality.

Supported by an experienced in-house engineering team, we adopt both 2D and 3D assisted design together with structural simulation and load calculation. With more than one hundred technical patents, we can validate every solution to perfectly match your excavator and site requirements.

Our comprehensive product portfolio covers sliding booms, long-reach booms, rock booms, demolition booms, excavator grabs, quick couplers and various buckets. This allows our overseas partners to source multiple attachments from one supplier.

We carefully select high-strength steel such as Q355B and Q690, and implement strict welding, non-destructive testing and load verification for every finished item. Before shipment, each product undergoes a full inspection to confirm performance and durability.

With export experience across more than sixty countries, we provide end-to-end technical support, detailed drawings, inspection photos and dependable after-sales service. Whether for dredging, deep foundation works, demolition or earthmoving, we deliver custom-built attachments to help your projects run smoothly.

团队风采 Our Team

千人同心 则得千人之力　**万人异心** 则无一人之用

The power of knowledge, the power of the power of unity and dedication, we will gets.

尊重 RESPECT　严格 RIGOROUS　高效 EFFICIENCY　合作 COOPERA-TION　创新 INNOVA-TION





14000㎡ Workshop

We has more than 14000㎡ steel structure workshop with lots of high precision processing equipments.



R&D Team

We use precision drawing software to achieve the max working range under the premise of safe operation.



Skillful Workers

There are more than 60 skillful staffs, 30 welding workers with over 5 years welding experience.



Customized

1. Fit all brand.
2. Color, length, material are customized.
3. Extra pipeline can be added.



Prompt Lead Time

1. Our lead time is 7-15 days.
2. Our annual output of excavator boom arms can reach 600 sets.



100% Service

1. Online support within 24 hours.
2. Appointment video technical support.

EXHIBITION











PRODUCT CATEGORY



Long Reach Boom



Two-Section Telescopic Arm



Three-Section Telescopic Arm



Pile Driving Arm



Sliding Arm



Tunnel Arm



Demolition Boom



Rock Arm

PRODUCT CATEGORY



Standard Bucket



Rock Bucket



Clamshell Bucket



Rock Ripper



Sliding Arm



Skeleton Bucket



Ditch Cleaning Bucket



Orange Peel Grapple



Root Rake

CERTIFICATIONS












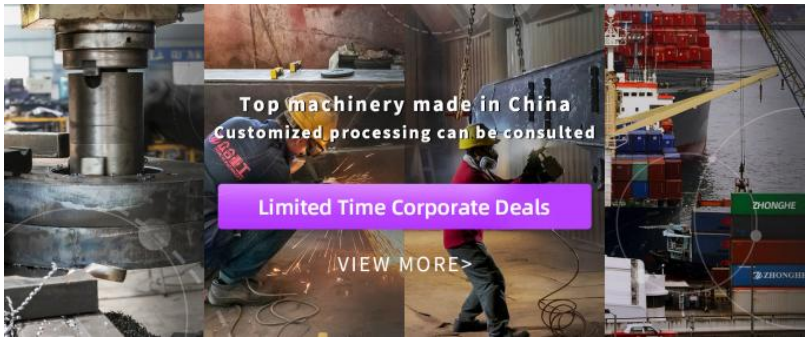

PRODUCTION ADVANATGES

Our factory has a complete range of production equipment, which is conducive to the production of our products, good quality and ensures product accuracy.




1. Panel is cut by CNC plasma machine with less deformation.
2. Tolerance within 5-10um, ensure the accuracy of hole .
3. Environmentally friendly verified spraying room.
4. GMAW-Gas Metal Arc Welding.
5. Plasma cutting machines, boring machines, beveling machines, bending machines, etc. ensure accuracy.


Large double-sided floor boring machine


CNC plasma cutting machine


Automatic edge milling machine



Environmentally friendly spary booth

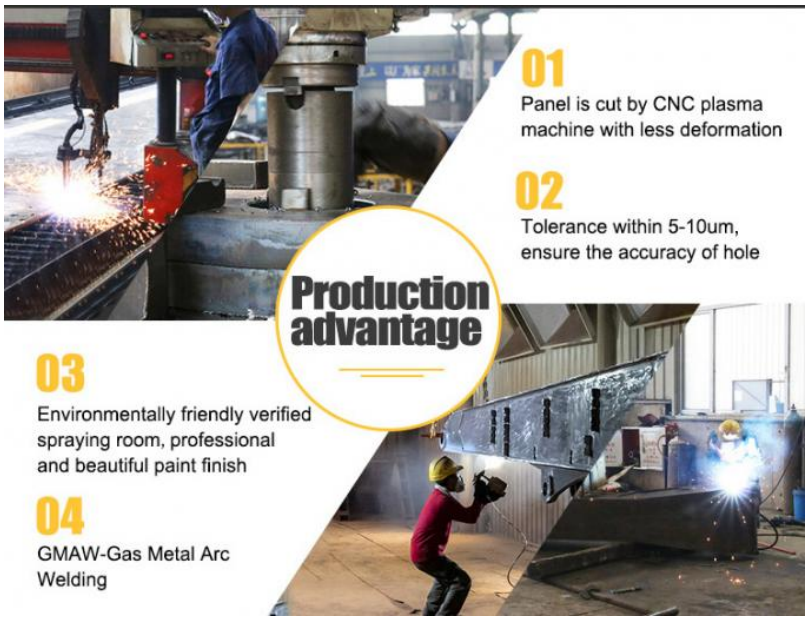



ZHONGHE triple quality control system

1.The first system is the technical design drawing review mechanism.
2.The second system is the semi-finished product review mechanism.
(each process has a detection testing for the previous process)
3.The third system is the finished product testing.
(Before painting, the overall inspection is carried out to check whether the design size matches the welding size, and whether the installation size meets the design requirement.)
To sum up, every single ZHONGHE product has been passed the above three-stage inspection system to ensure that is qualified before shipping.

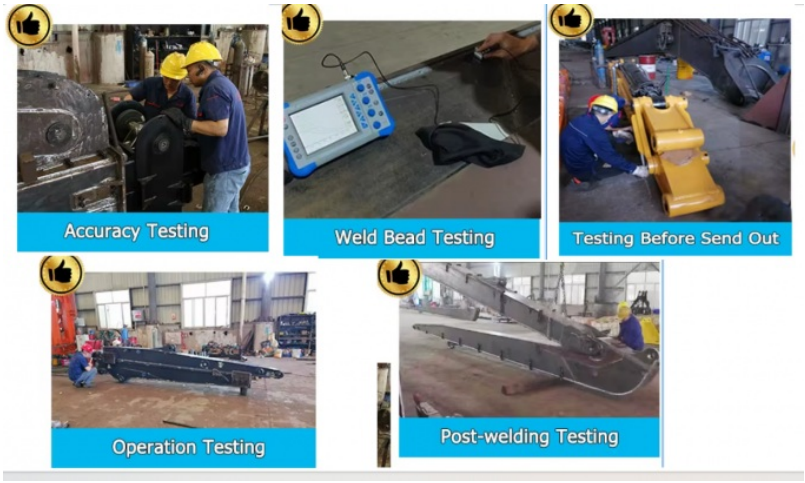
Accuracy Testing
Weld Bead Testing
Testing Before Send Out
Operation Testing
Post-welding Testing

Double-sided boring lathe




After the excavator boom and arm are assembled, the pins on the boom are drilled to ensure that the pins on the boom are parallel to each other and the cross section of the pin hole is perpendicular to the pin. The double -sided boring machine of the boom makes the hole position more accurate and the quality higher.








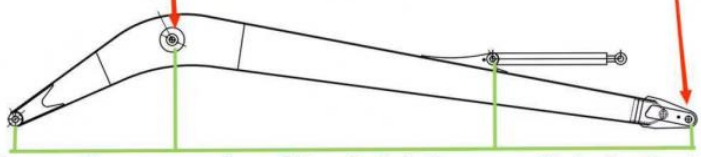


Make sure the cross section of the pin hole is perpendicular to the shaft.




Make sure the axis is parallel to the axis

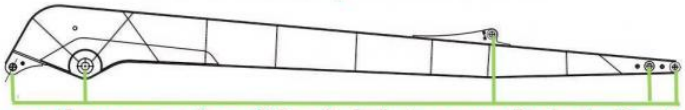


Make sure the cross section of the pin hole is perpendicular to the shaft

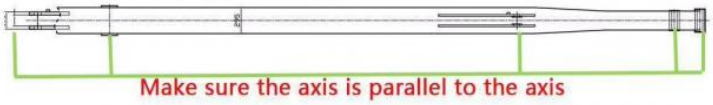

Make sure the axis is parallel to the axis

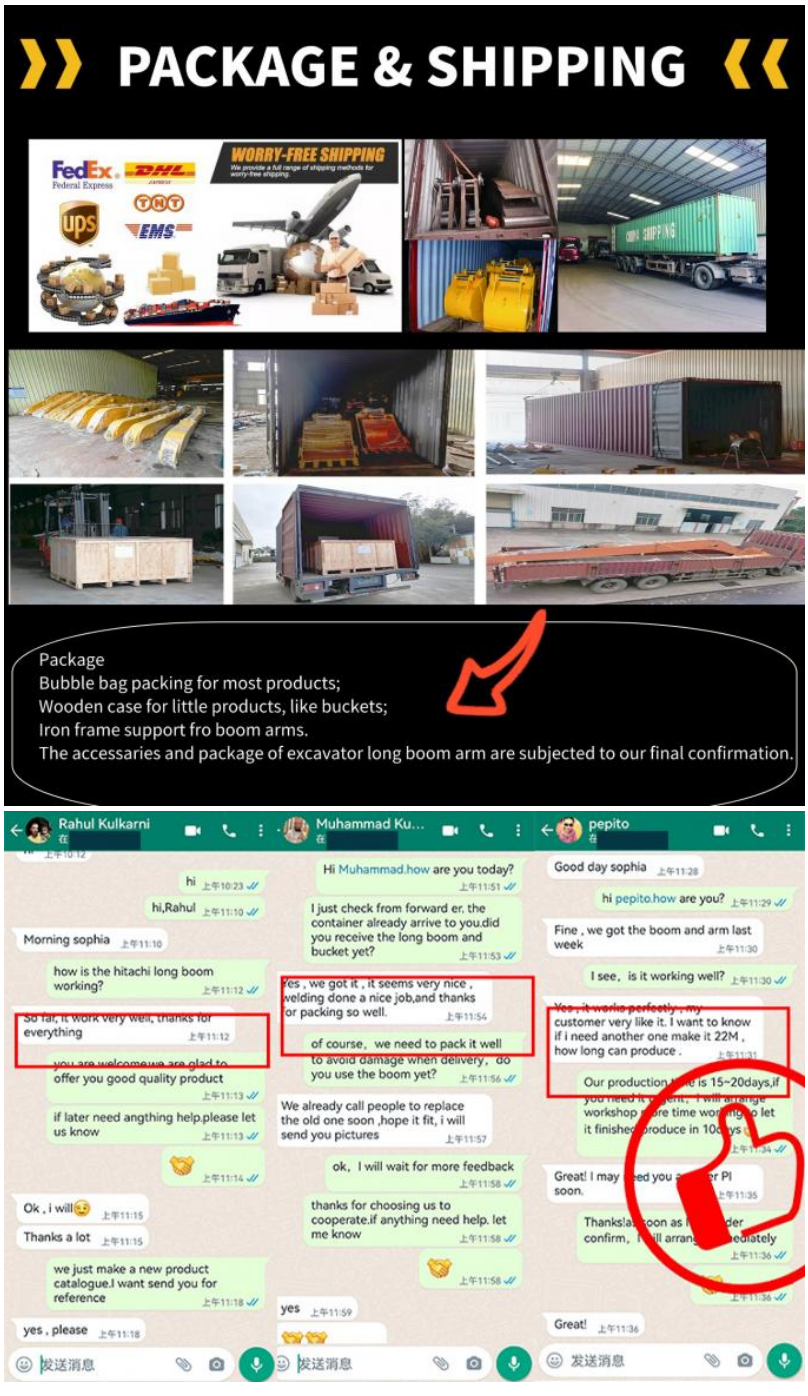
PACKAGE & SHIPPING
WORRY-FREE SHIPPING
Package
Bubble bag packing for most products;
Wooden case for little products, like buckets;
Iron frame support fro boom arms.
The accessaries and package of excavator long boom arm are subjected to our final confirmation.
Rahul Kulkarni
hi
hi,Rahul
Morning sophia
how is the hitachi long boom working?
So far, it work very well, thanks for everything
you are welcomewe are glad to offer you good quality product
if later need angthing help.please let us know
Ok , i will
Thanks a lot
we just make a new product catalogue.I want send you for reference
yes , please
Muhammad Ku...
Hi Muhammad.how are you today?
I just check from forward er. the container already arrive to you.did you receive the long boom and bucket yet?
Yes , we got it , it seems very nice , welding done a nice job,and thanks or packing so well.
of course, we need to pack it well to avoid damage when delivery, do you use the boom yet?
We already call people to replace the old one soon ,hope it fit, i will send you pictures
ok, I will wait for more feedback
thanks for choosing us to cooperate.if anything need help. let me know
yes
pepito
Good day sophia
hi pepito.how are you?
Fine , we got the boom and arm last week
I see, is it working well?
customer very like it. I want to know if i need another one make it 22M , how long can produce .
Great!
发送消息

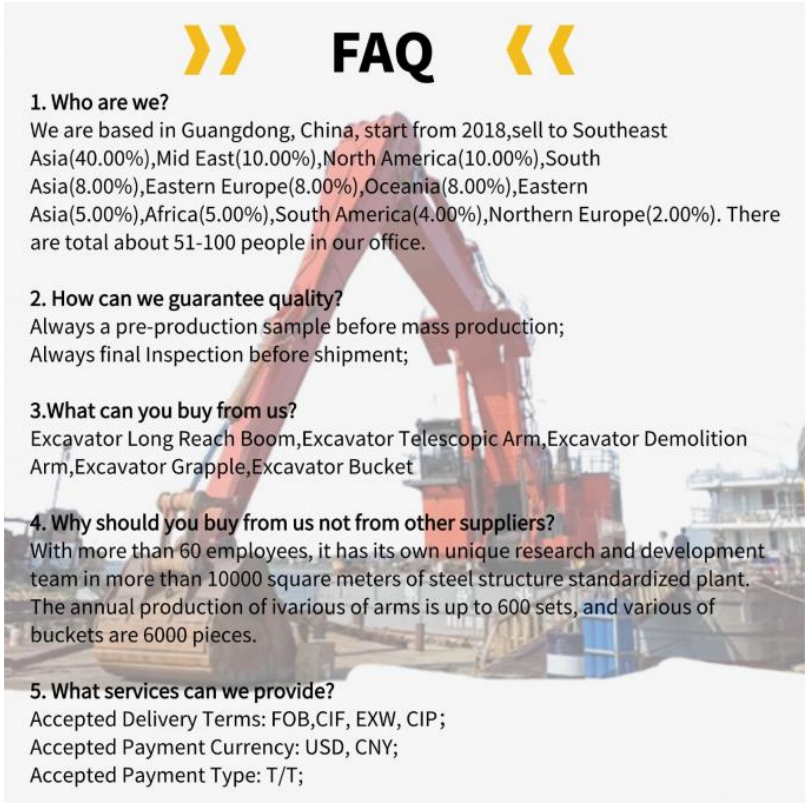

FAQ

1. Who are we?
We are based in Guangdong, China, start from 2018,sell to Southeast Asia(40.00%),Mid East(10.00%),North America(10.00%),South Asia(8.00%),Eastern Europe(8.00%),Oceania(8.00%),Eastern Asia(5.00%),Africa(5.00%),South America(4.00%),Northern Europe(2.00%). There are total about 51-100 people in our office.

2. How can we guarantee quality?
Always a pre-production sample before mass production;
Always final Inspection before shipment;

3.What can you buy from us?
Excavator Long Reach Boom,Excavator Telescopic Arm,Excavator Demolition Arm,Excavator Grapple,Excavator Bucket

4. Why should you buy from us not from other suppliers?
With more than 60 employees, it has its own unique research and development team in more than 10000 square meters of steel structure standardized plant. The annual production of ivarious of arms is up to 600 sets, and various of buckets are 6000 pieces.

5. What services can we provide?
Accepted Delivery Terms: FOB,CIF, EXW, CIP;
Accepted Payment Currency: USD, CNY;
Accepted Payment Type: T/T;

Jiangmen Kaiping Zhonghe Machinery Manufacturing Co., Ltd

+86 13822325403 aria@excavatorlongarm.com excavatorlongarm.com

9 Huancui West Road, Cuishanhu New Area, Kaiping City, Guangdong Province, China