



## Q355B+NM400 Wide Ditch Cleaning Bucket Mud Bucket Excavator Attachment for 8-11T Excavator for River Cleaning with High Quality

Our Product Introduction

for more products please visit us on excavatorlongarm.com

### Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Zhonghe
- Certification: CE
- Model Number: ZH-26
- Minimum Order Quantity: 1 piece
- Price: \$650/pieces
- Packaging Details: wooden case
- Delivery Time: 7 work days
- Payment Terms: T/T
- Supply Ability: 50 Piece/Pieces per Month



### Product Specification

- Brand: Kaiping Zhonghe Machinery
- Application: Excavator Attachment
- Type: Cleaning Bucket/Mud Bucket
- Material: Q355B+NM400
- Color: Customer Required
- Warranty: 3 Months
- Bucket Capacity: 0.33 M³
- Bucket Width: 1500mm
- Weight: 297KG
- Condition: 100%new
- OEM: Support
- MOQ: 1 PCS
- Packing: Wooden Case
- After-sales Service Provided: After-sales Service Available



### More Images



### Product Description

#### PRODUCT DESCRIPTION



Our Product Introduction



#### Introduction of Excavator Clean Bucket / Mud Bucket / Grade Ditch Bucket

- Overview:** Excavator mud bucket, also known as cleaning bucket, ditching bucket or trenching bucket, have no bucket teeth and large width. The mud bucket is very suitable for plane trimming of slopes with large capacity and desilting of rivers and ditches. Key steps in the welding process and the welding quality will directly affect the structural strength and bucket service life.
- Applicable environment:** It is applicable to the trimming of slopes and other planes, as well as the large capacity dredging and cleaning of rivers and ditches. Basing on the cleaning bucket, the tilting bucket changes the tilt angle through oil cylinder, greatly improving the work efficiency.

| 型号<br>Model | 项目<br>Item | 销轴直径 (mm)<br>Pin Diameter(mm) | 挖斗宽 (mm)<br>Bucket Width (mm) | 容量 (升)<br>Capacity (litres) | 重量<br>Weight | 材质<br>Material |
|-------------|------------|-------------------------------|-------------------------------|-----------------------------|--------------|----------------|
| 1-2T        | ZH-MINI    | <35                           | 900                           | 0.1                         | 94           | Q355B+NM400    |
| 3-4T        | ZH-24      | 40                            | 1200                          | 0.16                        | 184          |                |
| 5-7T        | ZH-25      | 45                            | 1200                          | 0.2                         | 220          |                |
| 8-11T       | ZH-26      | 50-55                         | 1500                          | 0.33                        | 297          |                |
| 12-18T      | ZH-27A     | 60/65/70                      | 1500                          | 0.6                         | 478          |                |
|             |            |                               | 1800                          | 0.75                        | 522          |                |
|             | ZH-27B     | 60/65/70                      | 1500                          | 0.72                        | 676          |                |
|             |            |                               | 1800                          | 0.8                         | 750          |                |
| 19-24T      | ZH-28A     | 80                            | 1800                          | 0.91                        | 842          |                |
|             |            |                               | 2000                          | 1.09                        | 910          |                |
|             | ZH-28B     | 80                            | 1800                          | 1.17                        | 1150         |                |
|             |            |                               | 2000                          | 1.35                        | 1214         |                |
| 25-30T      | ZH-29      | 90                            | 2000                          | 1.46                        | 1276         |                |
| 30-38T      | ZH-30      | 90/100/110                    | 2000                          | 1.64                        | 1600         |                |
|             |            |                               | 2200                          | 1.9                         | 1760         |                |
| 40-50T      | ZH-31      | 100/120                       | 2200                          | 2.4                         | 2545         |                |

**Excavator ditching bucket:**

ZHONGHE buckets are made of high-strength steel (HARDOX500/NM400/NM500/Q355, etc.) and assembled with high-quality parts. We choose different materials for different working conditions. Our goal is to provide competitive prices, excellent quality and excellent service to end consumers.

**Applications:**  
Surface trimming of slopes, dredging of riverbeds and ditches, etc. where larger bucket capacity is required.

Some pictures of Clean Bucket





## COMPANY ADVANTAGES

开平在众合机械制造有限公司坐落于美丽的广东江门市开平市鹤山高新区第一工业园，是一家集研发、生产、销售一体化的企业。公司凭借专业的技术与设计研发，不断开发符合市场需求的高科技产品，始终站在行业的最前沿。

公司註冊有100多名員工，專業技術人員30名。註冊資產年加工生產各類型號管量可達600萬根。公司擁有16000多平方英尺的模化廠房，大型高標加工設備，如：磨床、數控大型磨床、先進臥式、精密落地磨床、立式磨床、大型車床及床、大型軸孔處理車、強力鑽床、大型磨床、高硬度合金氣缸氣缸等。

我部多年来工程装备制造精良，自主研发、生产埋弧焊20长管、投石筒、两柱式伸臂筒、滑槽、三柱式伸臂筒、三柱式吊钩筒、石盲筒、隔道筒、液压顶块钻、炮头、打桩筒、夹土筒、割草机、松土器等工程的机械配件。广泛应用于筑路石盲管、架桥梁、铁路铁线、市政管道工程、河道清淤、排泥斜板、投石筒钢板打靶、桩基工程、垂直回收等工程行业。产品远销40多个国家和地区。

公司拥有强大的技术研发团队,已获得100多项技术专利,处于行业领先地位。产品采用先进的2D、3D辅助设计,通过应力分析设计可靠实现,高品质的产品。

“誠信是金合立業之本，品質是金合生存之基，市場是金合發展之源，創新是金合發展之機，品牌是金合壯大之神。打造‘金合’國際品牌，創新發展產業科技”

开平亦众合机械制造有限公司愿与各界朋友携手共进，共创美好明天！

金



众志成城

志成城，合创未来

人 創未來



阿子連



---

Established in 2018, Xiejing Zhongke Machinery Manufacturing Co., Ltd. is a combination of manufacturing and trading, specializing in customizing different kinds of excavator boom arms and attachments. Our products, including excavator long reach booms, demolition arms, 2-3 sections telescopic arms, tunnel arms, standard rock buckets, grapples, and rippers, have been selling well in more than 40 countries and areas.

We are located in Cuihuifu New District, Kaiping City, Jiangmen City, Guangdong Province, China, and we boast a 180000+ class structure with a large number of high precision processing equipment and a strong and cohesive team of over 100 experienced technical staff, 50 working years with over 7 years experience, 30 senior designers, and a high-tech R&D team (20+ years on customization, 100+ technical patents), strict production system (5+ years quality control and cost control) and warm-hearted service team. Our annual output of various types of excavator boom arms can reach up to 600 sets.

Kaiping Zhongye Machinery Manufacturing Co., Ltd. are committed to providing our customers with products of the highest quality at a moderate price, with quick response and appropriate warranty. We strive to uphold our core principles of "Best Quality, Sincere Management, and Customer Satisfaction".





### 14000m<sup>2</sup> Workshop

We have more than 14000m<sup>2</sup> steel structure workshop with lots of high precision processing equipments.



### R&D Team

We use precision drawing software to achieve the max working range under the premise of safe operation.



### Skillful Workers

There are more than 60 skillful staffs, 30 welding workers with over 5 years welding experience.



### Customized

1. Fit all brand.
2. Color, length, material are customized.
3. Extra pipeline can be added.



### Prompt Lead Time

1. Our lead time is 7-15 days.
2. Our annual output of excavator boom arms can reach 600 sets.



### 100% Service

1. Online support within 24 hours.
2. Appointment video technical support.

## PRODUCTION ADVANTAGES

### Production Process

1. Panel is cut by CNC plasma machine with less deformation
  2. Each welder has more than ten years of experience to ensure stable quality
  3. environmentally friendly verified spraying room
  4. professional and beautiful paint finish
  5. three layers with four passes welding
  6. Graphite alloy copper sleeve
  7. Seamless precision steel pipe
  8. Centralized lubrication system
- The equipments we have:




Large double-sided floor boring machine



CNC plasma cutting machine



Automatic edge milling machine

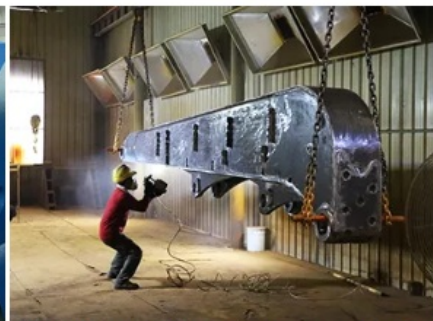

Environmentally friendly spray booth



## CERTIFICATE

### CE certification & Utility model patent certificates



### Steel plates certifications

| 宝钢股份 宝山钢铁股份有限公司                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |       | 产品质量证明书                |      |                                   |                          |         |        |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |    |    |    |    |      |      |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------------------------|------|-----------------------------------|--------------------------|---------|--------|------|------|----|---|-------|--------------|------|-----------------------------------|--------------------------|---------|--------|--|---|-------|--------------|------|-----------------------------------|--------------------------|---------|--------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----|----|----|----|------|------|------|------|----|---|-------|--------------|------|-----------------------------------|--------------------------|---------|--------|--|---|-------|--------------|------|-----------------------------------|--------------------------|---------|--------|--|
| Baosteel Group Co., Ltd.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       | Inspection Certificate |      |                                   |                          |         |        |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |    |    |    |    |      |      |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |
| <table border="1"> <tr> <th>炉号</th><th>钢号</th><th>规格</th><th>重量</th><th>化学成分</th><th>力学性能</th><th>金相组织</th><th>无损检测</th><th>备注</th></tr> <tr> <td>1</td><td>Q235B</td><td>1000*1500*12</td><td>18.8</td><td>C:0.22, Mn:0.18, P:0.015, S:0.010</td><td>屈服强度:355MPa, 抗拉强度:460MPa</td><td>铁素体+珠光体</td><td>超声检测合格</td><td></td></tr> <tr> <td>2</td><td>Q235B</td><td>1000*1500*12</td><td>18.8</td><td>C:0.22, Mn:0.18, P:0.015, S:0.010</td><td>屈服强度:355MPa, 抗拉强度:460MPa</td><td>铁素体+珠光体</td><td>超声检测合格</td><td></td></tr> </table> |       | 炉号                     | 钢号   | 规格                                | 重量                       | 化学成分    | 力学性能   | 金相组织 | 无损检测 | 备注 | 1 | Q235B | 1000*1500*12 | 18.8 | C:0.22, Mn:0.18, P:0.015, S:0.010 | 屈服强度:355MPa, 抗拉强度:460MPa | 铁素体+珠光体 | 超声检测合格 |  | 2 | Q235B | 1000*1500*12 | 18.8 | C:0.22, Mn:0.18, P:0.015, S:0.010 | 屈服强度:355MPa, 抗拉强度:460MPa | 铁素体+珠光体 | 超声检测合格 |  | <table border="1"> <tr> <th>炉号</th><th>钢号</th><th>规格</th><th>重量</th><th>化学成分</th><th>力学性能</th><th>金相组织</th><th>无损检测</th><th>备注</th></tr> <tr> <td>1</td><td>Q235B</td><td>1000*1500*12</td><td>18.8</td><td>C:0.22, Mn:0.18, P:0.015, S:0.010</td><td>屈服强度:355MPa, 抗拉强度:460MPa</td><td>铁素体+珠光体</td><td>超声检测合格</td><td></td></tr> <tr> <td>2</td><td>Q235B</td><td>1000*1500*12</td><td>18.8</td><td>C:0.22, Mn:0.18, P:0.015, S:0.010</td><td>屈服强度:355MPa, 抗拉强度:460MPa</td><td>铁素体+珠光体</td><td>超声检测合格</td><td></td></tr> </table> |  | 炉号 | 钢号 | 规格 | 重量 | 化学成分 | 力学性能 | 金相组织 | 无损检测 | 备注 | 1 | Q235B | 1000*1500*12 | 18.8 | C:0.22, Mn:0.18, P:0.015, S:0.010 | 屈服强度:355MPa, 抗拉强度:460MPa | 铁素体+珠光体 | 超声检测合格 |  | 2 | Q235B | 1000*1500*12 | 18.8 | C:0.22, Mn:0.18, P:0.015, S:0.010 | 屈服强度:355MPa, 抗拉强度:460MPa | 铁素体+珠光体 | 超声检测合格 |  |
| 炉号                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 钢号    | 规格                     | 重量   | 化学成分                              | 力学性能                     | 金相组织    | 无损检测   | 备注   |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |    |    |    |    |      |      |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Q235B | 1000*1500*12           | 18.8 | C:0.22, Mn:0.18, P:0.015, S:0.010 | 屈服强度:355MPa, 抗拉强度:460MPa | 铁素体+珠光体 | 超声检测合格 |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |    |    |    |    |      |      |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Q235B | 1000*1500*12           | 18.8 | C:0.22, Mn:0.18, P:0.015, S:0.010 | 屈服强度:355MPa, 抗拉强度:460MPa | 铁素体+珠光体 | 超声检测合格 |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |    |    |    |    |      |      |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |
| 炉号                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 钢号    | 规格                     | 重量   | 化学成分                              | 力学性能                     | 金相组织    | 无损检测   | 备注   |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |    |    |    |    |      |      |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Q235B | 1000*1500*12           | 18.8 | C:0.22, Mn:0.18, P:0.015, S:0.010 | 屈服强度:355MPa, 抗拉强度:460MPa | 铁素体+珠光体 | 超声检测合格 |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |    |    |    |    |      |      |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Q235B | 1000*1500*12           | 18.8 | C:0.22, Mn:0.18, P:0.015, S:0.010 | 屈服强度:355MPa, 抗拉强度:460MPa | 铁素体+珠光体 | 超声检测合格 |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |    |    |    |    |      |      |      |      |    |   |       |              |      |                                   |                          |         |        |  |   |       |              |      |                                   |                          |         |        |  |

## PRODUCT ADVANTAGES




### Strong and sturdy

Robust base plate. Professional welding skill towards different bearing position. Steel plate chamfering bevels before welding.



### Less maintainance

Using high quality materials, Q355B, NM400, hardox500 optional, strong bushing.



### As your request

The tilt bucket's width and opening angle can be customized.




### High effective

1. Separated plates design, load & unload easily.
2. Horizontal widening and depth reducing improve its work efficiency





## CUSTOMER FEEDBACK

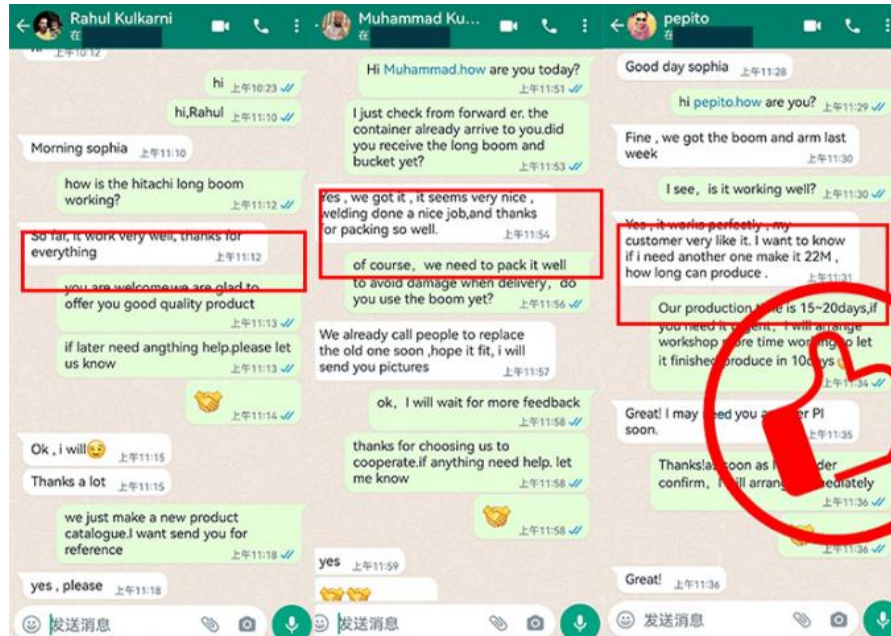

## PACKING & DELIVERY

Bubble bag packaging for most products, Wooden case for little products, like buckets  
Iron frame support for boom arms.

The accessories and package of excavator long boom arm are subjected to our final confirmation.



## FAQ

### 1. How do I start to order?

Firstly, talk to our sales about your machine model, working conditions, special needs and deadline. Then we will give you proposals FYR. You will receive a quotation within 24 Hours after confirming the proposal.

### 2. Why not have boom and stick cylinders in the plan?

A1: First, the whole long arm is lengthening, but the boom just lengthening from its middle sleeve to its end, so the original boom and stick cylinder can be used. Second, using the original parts can save your cost.

### 3. Are you always delivered on time?

We can't promise about the freight but what we can do is shortening our lead time while keep the same quality level. So there will not be any problem even if the sea freight delay for a couple days. Our annual output of various types of excavator boom arms can reach 600 sets.

### 4. How long is the boom arm can mini excavator be configured with? Whether it is necessary to increase the counterweight?

A2: Generally speaking, 30-40 excavator longest arm suggests to be 8 meters, can configure 0.1 cbm bucket, no need extra counterweight. 55 excavator longest arm suggests to be 12 meters, can configure 0.1-0.15 cbm bucket, need 0.5 ton extra counterweight. 60-80 excavator longest arm suggests to be 12 meters, can configure 0.15-0.25 cbm bucket, need 0.5-0.7 ton extra counterweight.

It is not recommended to extend boom arm to longest length as mini excavator is easy to sloshing.

### 5. How long will it takes to install a excavator long reach boom?

With reference to the efficiency of Chinese workers, and tools are fully prepared, it only takes one day to complete the disassembly and assembly.

Kindly remind, prepare several containers to fill the oil before disassemble.

**Recommended by seller**

## HOT CUSTOMIZED PRODUCTS

Goods that people like to customize



### Long Reach Excavator Boom

- Long Reach Boom /
- Three Sections Demolition Arm /
- Demolition Extension Arm /

[Customize now](#)



### Demolition Boom

- Long Demolition Boom /
- Super Long Demolish Distance /
- Safe Demolition /

[Customize now](#)



## Telescopic Boom

- Three-stage Extension /
- Super Long Control Distance /
- Flexible Expansion /

[Customize now](#)

|          |                          |
|----------|--------------------------|
| Contact  | Iris                     |
| Tel      | 00 8615362217237         |
| Whatsapp | +86 8615362217237        |
| E-mai    | whq@excavatorboomarm.com |



**Jiangmen Kaiping Zhonghe Machinery Manufacturing Co., Ltd**



+86 13822325403



aria@excavatorlongarm.com



excavatorlongarm.com

9 Huancui West Road, Cuishanhu New Area, Kaiping City, Guangdong Province, China